


COURSE 1

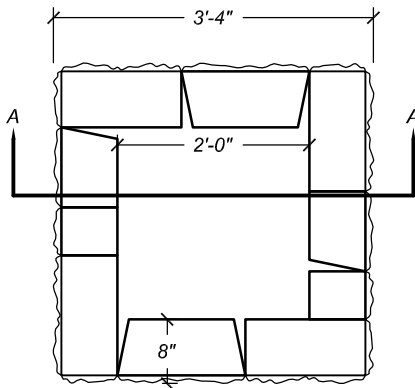


COURSE 2


NOTES:

- 1) INSIDE OF FIRE PIT MUST BE LINED WITH A HEAT-RESISTANT MATERIAL.
- 2) AFFIX ALL UNITS WITH CONSTRUCTION-GRADE ADHESIVE.
- 3) THESE BLOCKS ARE NOT FIREPROOF AND COULD START TO CRACK UNDER EXTREME HEAT. THESE BLOCKS ARE INTENDED FOR LANDSCAPE APPLICATIONS AND ARE NOT FIRE-RATED. OVER TIME THE BLOCKS MAY CRACK. A POSSIBLE SOLUTION IS TO USE HEAVY FIRE-RATED BRICKS OR A STEEL LINER ON THE INTERIOR OF AN ABOVE- OR BELOW-GROUND FIRE PIT WITH THE BLOCKS OUTSIDE THE PERIMETER. AGAIN, THE HEAT MAY ADVERSELY AFFECT LANDSCAPE PRODUCTS, EVEN WITH AN INTERIOR HEAT-RESISTANT BARRIER IN PLACE.

PIECE COUNTS:	
COLUMN/CORNER	8
6X16	5
6X10	3
6X6	3

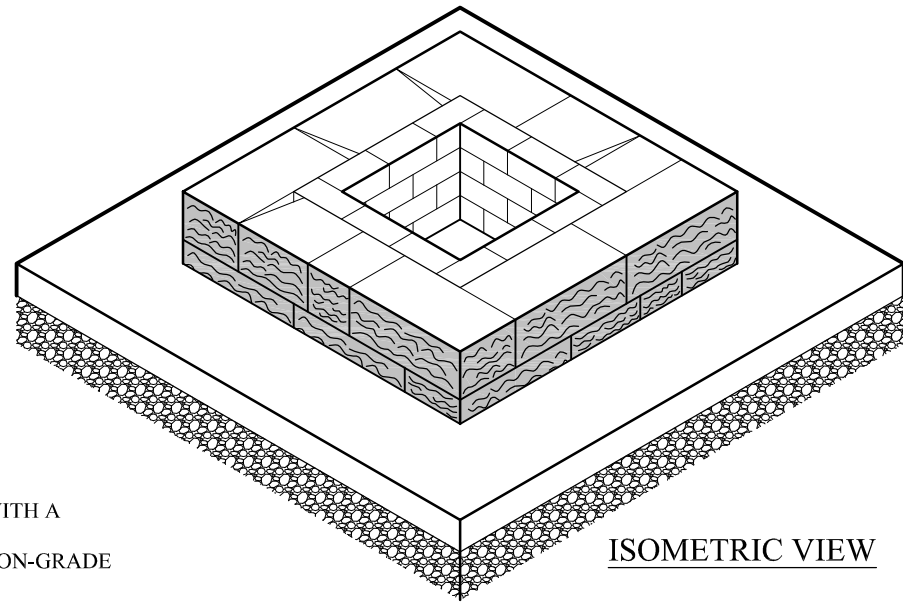

ISOMETRIC VIEW

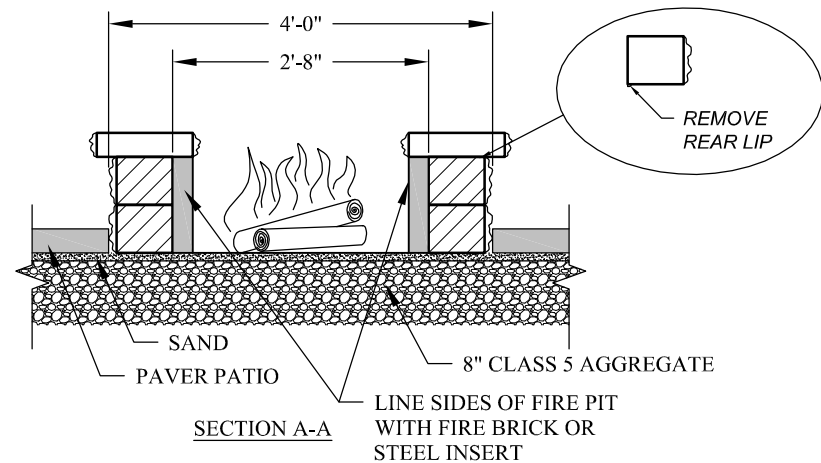

SECTION A-A

LINE SIDES OF FIRE PIT WITH FIRE BRICK OR STEEL INSERT



Anchor Wall Engineering, LLC
5959 Baker Road, Suite 390
Minnetonka, MN 55345

These graphic representations are intended for preliminary design purposes only and are not to be used for construction without the signature of a registered professional engineer.

© 2011 Anchor Wall Engineering, LLC
& and TM Anchor Wall Systems, Inc.

Drawn By: AWE
Date: 1/26/2011
Scale: 1/2"=1'-0"

Drawing Title: **Brisa™ Retaining Wall Systems
Square Fire Pit Construction**

Project Information: Typical Details For
Conventional Retaining Walls