


GEOWALL™ PRO UNIT
GROUT UNIT VOIDS


CUT UNITS TO FIT
OPENING. MIN WIDTH
44"

60MM BULL NOSE PAVERS.
GLUE PAVERS IN PLACE.

LANDING DISTANCE SHALL NOT BE
LESS THAN 11" AND SHALL NOT VARY BY
MORE THAN 3/8" IN LENGTH.

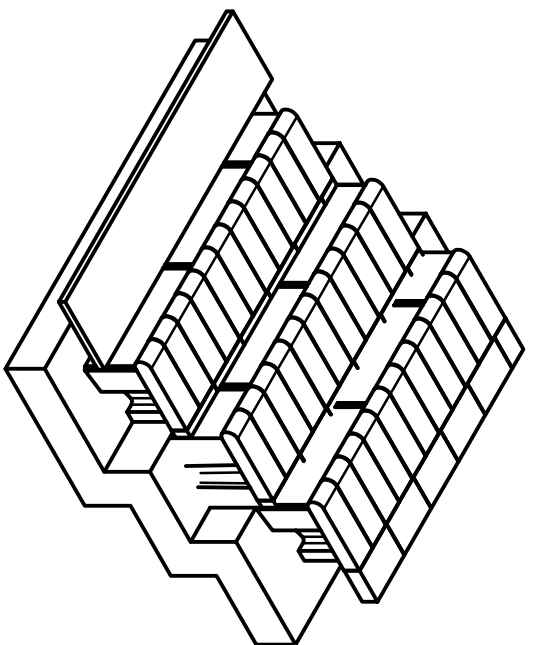

CUT 60MM PAVER
TO FILL STEP

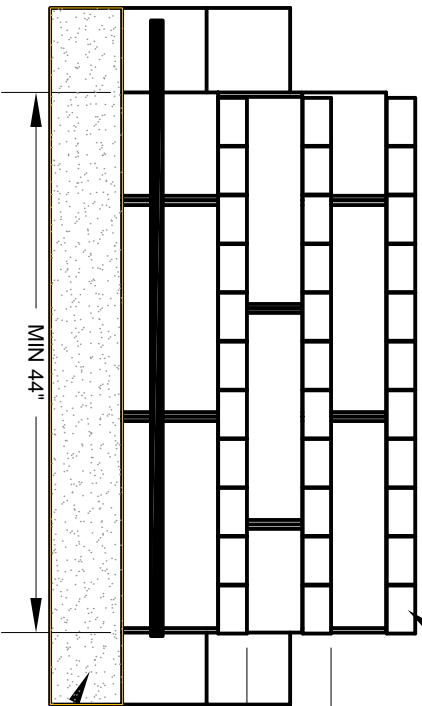


MIN 44"

4" TO 7"

RISER SPACING SHALL
NOT VARY BY MORE THAN
3/8" STEP TO STEP

GRADE 4" TO
7" BELOW
STEP

6" CRUSHED STONE
LEVELING PAD

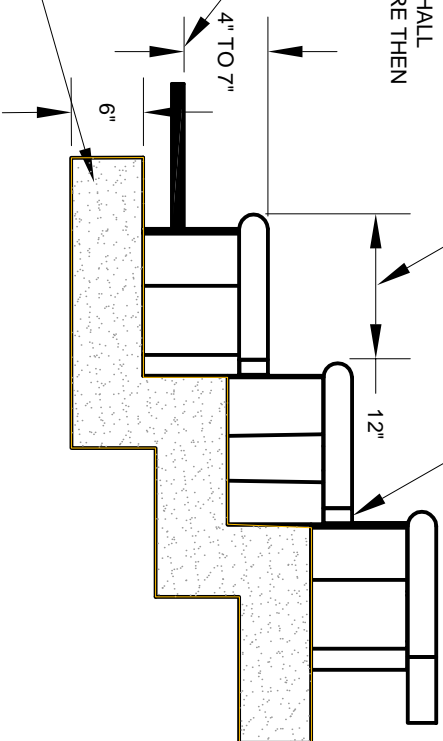

12"

4" TO 7"

6"

No.	Date	Revision	By

The information on this drawing is for conceptual design and should not be used without the signature of a professional engineer. Details should be specific to the project and project site requirements.



www.basalite.com

Project
GEOWALL Standard Drawings

Title
STAIR DETAIL

Date
9/8/15

Scale
As Noted

Drawn By:
rjr

Sheet